

A794

Single Station Thermal Printer

Presenting the smaller, smarter, faster A794 from TPG. The ideal single station thermal receipt printer for retail, kitchen environments and hospitality applications.

The A794 offers the same ultra-reliable quality you have come to expect from TPG, plus many new features.

Revolutionary

In 1993, we revolutionized the industry with the A793 printer with our Clamshell™ drop-in paper loading system.

Smaller, Smarter, Faster

The A794 offers the same ultra-reliable quality of the A793, plus many new features.

Smaller Footprint, Larger Paper Roll

At 6" x 7" x 5", it's smaller and more compact than any comparable printer on the market. At the same time it also features a large 90 mm (outside diameter) paper roll capacity.

One Button Programming

With the push of a single button, you can program the baud rate, interface and energy consumption mode.

More Printing Speed

The A794 prints 40 lines per second, making it one of the fastest printers in its class. This dramatically reduces the waiting time at the POS.

A794 Detailed Features

Various hardware options can customize the A794 printer to your application:

- Available in 2 colors: light grey or charcoal.
- Printer wall mounting kit as an option for use in the kitchen for space saving purposes.

Other TPG Products

TPG supplies a large family of printer products and accessories to offer customers a wider choice for applications and maximum flexibility in design.



The A794 offers the same ultra-reliable quality you have come to expect from TPG, plus many new features.



A794


Single Station Thermal Printer



Technical Specifications

Print Method	Direct Thermal, 203 DPI
Character Cell Size	13 x 24, 10 x 24
CPI	15.6, 20.3
Print Columns	44 & 56 Columns
Character Sets	Code Page 437, 850, 852, 858, 860, 863, 865, 866 and 1252. Contact your TPG representative for expanded character sets.
Bar Codes	UPC-A, UPC-E, Code 39, Code128, EAN128, JAN8 and JAN13 (EAN), Interleaved 2 of 5, Codabar, PDF417
Printing Speed	40 LPS (130 mm/s)
Auto Cutter	Full and Partial Cut Selectable
Data Buffer	4K
User Memory	256K up to 1792K Flash Shared (graphics, logos, user defined characters)
Communication	Mother/Daughter Board Architecture Supports:
Interface(s)	RS-232, IEEE-1284 Bi-directional Parallel, USB, Ethernet Cash Drawer Control 1-2 Drawers
Paper Type	Direct Thermal, POS Grade(s)
Paper Roll (W x D)	3.15" x 3.55" Dia. (80 mm x 90 mm Dia.)
Power	24 VDC +/- 5%
Certifications	EMI: FCC, ICES-003, VCCI: Class A; CE, Austel: Class B Safety: UL 1950, CSA 22.2 No. 950, CE (EN60950), MITI (power supply)
Reliability	150 km Paper (45 Million Lines) 1.5 Million Autocuts
Dimensions (W x D x H)	5.65" x 7.27" x 5.27" (144 mm x 185 mm x 134 mm)
Weight	3.0 lbs. (1.35 kg)
Control Language	Application Compatible Escape Commands
Printer Drivers	Windows 2000/XP/ME/98/95/NT 4.0/OPOS 1.4
Windows® and Windows NT® are trademarks of Microsoft Corporation.	

*Per TPG standard test conditions

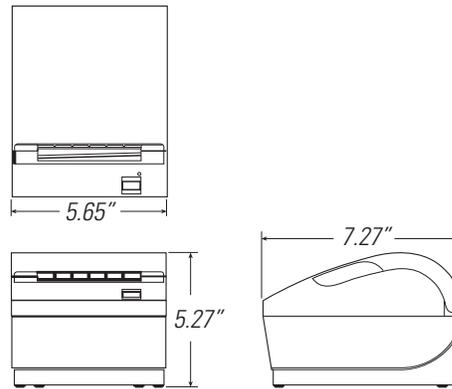

Transaction Printer Group, Inc. – Headquarters
25 Tri-State International, Suite 200, Lincolnshire, IL 60069
Tel: 847 383 7900 Fax: 847 383 7949 www.TPGprinters.com

USA – 800 732 8950
Maxatec – 44 0 161 942 7850

© 2004 Transaction Printer Group, Inc. a subsidiary of ATSI Holdings, Inc. All Rights Reserved. Patents pending. All trademarks or registered trademarks are the property of their respective owners. Printed in U.S.A. Product specifications are subject to change in order for TPG to continue to meet the needs of the market.